

规格书
Specification

品名
Model name

YHE12L

PROPRIETARY
Huayu Electronic co.,Ltd.

CONFIDENTIAL
Huayu Electronic co.,Ltd.

Version #	Spec V1.0
制作日期 Date	2014/4/01
准备 Prepared	Yi Shen Acoustic specialist,R&D Dept.
承认 Approved	Qian Wanjin Executive Manager,R&D Dept.



兴化市华宇电子有限公司

Components Operating Div.
Huayu Electronic co.,Ltd.

1.适用范围：本规范适用于 YHE12L 蜂鸣器。

This specifications apply the YHE12L buzzer.

2.基本规格/General specification

项目/Item	YHE12L-03	YHE12L-05	YHE12L-12	YHE12L-24	条件/Condition
1 额定电压 Rated voltage	3VDC	5VDC	12VDC	24VDC	
2 工作电压 Operation voltage	2~5VDC	4~7VDC	8~16VDC	16~28VDC	
3 声压 Sound Pressure Level=SPL	Min 85dB Typical 90dB				测试环境：标准状态，标准驱动 电路，额定电压 测试距离：0.1m Standard State,Standard Drive Circuit. Rated voltage,Distance at 0.1m
4 平均消费电流 Average consumption current	Max 30mA				
5 振荡频率 Oscillation frequency	2300±300Hz				
6 响应时间 Response time	Max 50mS				最低工作电压 Lowest operation voltage
7 工作温度范围 Range of operation temperature	-30~+80℃				声压 ≥75dB SPL ≥75dB
8 保存温度范围 Range of preservation temperature	-30~+80℃				
9 端子强度 Terminal strength	10N				拉负荷方向的终端轴 Pull load on the direction of the terminal axis
10 外部尺寸 Externals size	Φ12x9.5				参阅附图 Refer to the attached drawing
11 重量 Mass	2g				

☆标准状态：常温（15~35℃），湿度（25~85%相对湿度），空气压力（860~1060hpa）

在假设的情况判断，测试是一基本状态下进行。

Standard State:Ordinary Temp(15~35℃),Humidity(25~85%RH),Air pressure(860~1060hPa)



In case of doubtful judgment,the test is re—performed under Basic State.

☆基本情况：温度。（20±2℃），湿度（60~70%相对湿度），空气压力（860~1060hpa）

Basic State: Temp.(20±2℃),Humidity(60~70%RH),Air pressure(860~1060hPa)



< 标准驱动电路 >/<Standard Drive Circuit>

< 标标测试治具 >/<Standard Test Fixture

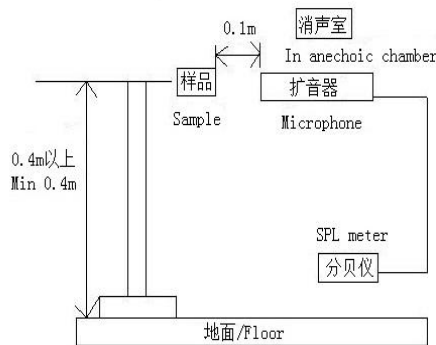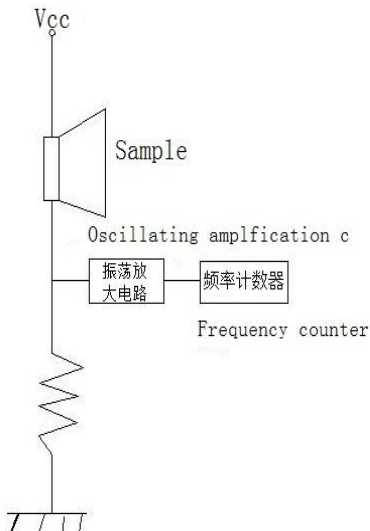

3. 可靠性规范/Reliability specification

YHE12L-05 SPEC V1.0

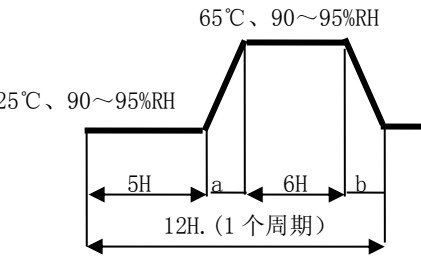项目/Item	试验条件/Test condition	判断标准/Criteria	引用规格
1 高温保存试验 High temperature Preservation	+85℃环境下放置 96 小时 Exposure to +85℃ for 96 hrs.	经过测试, 符合规格, 没有任何不合格的外观和性能, 除了是 80 分贝或以上 (2300±400 Hz) After the test the part shall meet specifications without any degradation in appearance And performance except SPL. SPL shall be 80 dB More. (at 2300±400 Hz)	GB/T 2423.2
2 低温保存试验 Low temperature preservation	-40℃环境下放置 96 小时 Exposure to -40℃ for 96 hrs.		GB/T 2423.1
3 耐温试验 Thermal Shock	 10 次周期 10 cycles		GB/T 2423.4
4 温湿度试验 Thermal, Humidity Shock	 10 周期 10 cycles		
5 常温寿命试验 Ordinary Temp. Life	常温 (25℃±10℃) 电压 5VDC 连续测试 1000 小时 Driving the sounder at 5VDC for 1000hrs in the room temperature (25℃±10℃)		
6 高温寿命试验 High Temp. Life	高温 (+85℃) 电压 5VDC 连续测试 500 小时 Driving the sounder at 5VDC for 500hrs in the low temperature (+85℃)		
7 低温寿命试验 Low Temp. Life	低温 (-40℃) 电压 5VDC 连续测试 500 小时 Driving the sounder at 5VDC for 500hrs in the low temperature (-40℃)		

4. 尺寸图/Dimension

